

Phone Office/Lab (02) 6775 1157
Fax (02) 6775 1043
ABN: 72 212 385 096
email: rob@lanfaxlabs.com.au
Website: <http://www.lanfaxlabs.com.au>
493 Old Inverell Road
(P.O. Box W90) Armidale NSW 2350
Director: Dr Robert Patterson FIEAust, CPSS, CPAg
Soil Scientists and Environmental Engineers

Lanfax Laboratories

Performance certified by Aust. Soil & Plant Analysis Council

LAUNDRY PRODUCTS RESEARCH

Laundry products were purchased by **Lanfax Labs** from supermarkets in Armidale, NSW and a number of boutique products were provided by manufacturers. A total of 41 liquids and 54 powders were tested by mixing each product at the manufacturer's recommended dose for either front loading or top loading automatic washing machines. The dose was calculated at the full cycle load, that is 75 L for front loaders and 150 L for top loaders. The full cycle accounts for the water used in the wash, spin, rinse, deep rinse and spin rinse cycle. The quantities of 75 L for front loaders and 150 L for top loaders were taken from averaged rates for those machines (Patterson, 2004).

Each sample was mixed with cold (20°C) deionised water (to replicate good quality rainwater). Where town water supplies are used, the values reported for sodium concentrations may increase because of sodium in the reticulated water – that will vary from location to location, usually higher in inland than coastal towns. Each sample was shaken for 30 minutes to replicate the washing action.

The concentrations of sodium and phosphorus (and other elements) were measured on the samples using Inductively Coupled Plasma (ICP) technology in accordance with current Good Laboratory Practices at **Lanfax Labs**.

Only sodium (g/wash) and phosphorus (mg/L) are reported in the graphs presented here.

Additional information on this unique research may be obtained at: www.lanfaxlabs.com.au/laundry.htm

Other papers on laundry detergents can be found at: www.lanfaxlabs.com.au/publications.html

HOW TO READ THE GRAPHS

Each product is represented by two bars: the top bar (if present) shows the phosphorus concentration (mg/L); while the lower bar shows the sodium load (g/wash). The graph is arranged in ranked order of sodium load. Figure F1 is for 54 detergents at the front loader rate, Figure T1 is for 89 detergents at the top loader rate.

Sodium Load

For all on-site systems that apply the effluent by surface or subsurface application, the levels of sodium in the discharge are critical to long term absorption. Choose the product with the lowest sodium load (g/wash). Levels above 20 g/wash are likely to be detrimental to plants and the soil although plant tolerance and soil types will vary. The shorter the bar, the lower the load. When in doubt, choose the lower sodium load.

The detergents with long sodium bars (greater than 20 g/wash) should not be thrown onto your favourite garden as the sodium may be detrimental to the plants. High pH (see the website for pH data) is also detrimental to plants and soil. The pH of liquids (average pH 8) is generally lower than pH of powder detergents (average pH 10.5).

Phosphorus Concentration

The choice of a suitable level of phosphorus in the greywater (laundry water discharge) will depend upon the soil type and the use of the effluent. In some soils, phosphorus is not a real concern because of the natural ability of the soil to immobilize the phosphorus and limit its leaching from the disposal site. In other soils, phosphorus is likely to build up to high levels and leach from the soil. It is preferable to choose the lower phosphorus values as well as the low sodium values. The load of phosphorus for each product is available in the website data.

©Copyright Restriction

This material may only be reproduced in full (three pages) for educational purposes. None of the graphs should be construed as an endorsement of one product over another, or that one product is superior or inferior to another. The data are presented as measurements of fact, ranked in order of sodium.

This research was funded by Lanfax Labs and was independent of any manufacturer or other organisation.

Caution: Formulations may have changes since these products were purchased in 2005.

Soil survey and analytical assessments, landscape analysis and plant nutrient relationships
Independent research and commercial analytical laboratories. Environmental management consultants

Figure F1 - FRONT LOADING MACHINE CYCLE
Full wash cycle: Front loader = 75 L


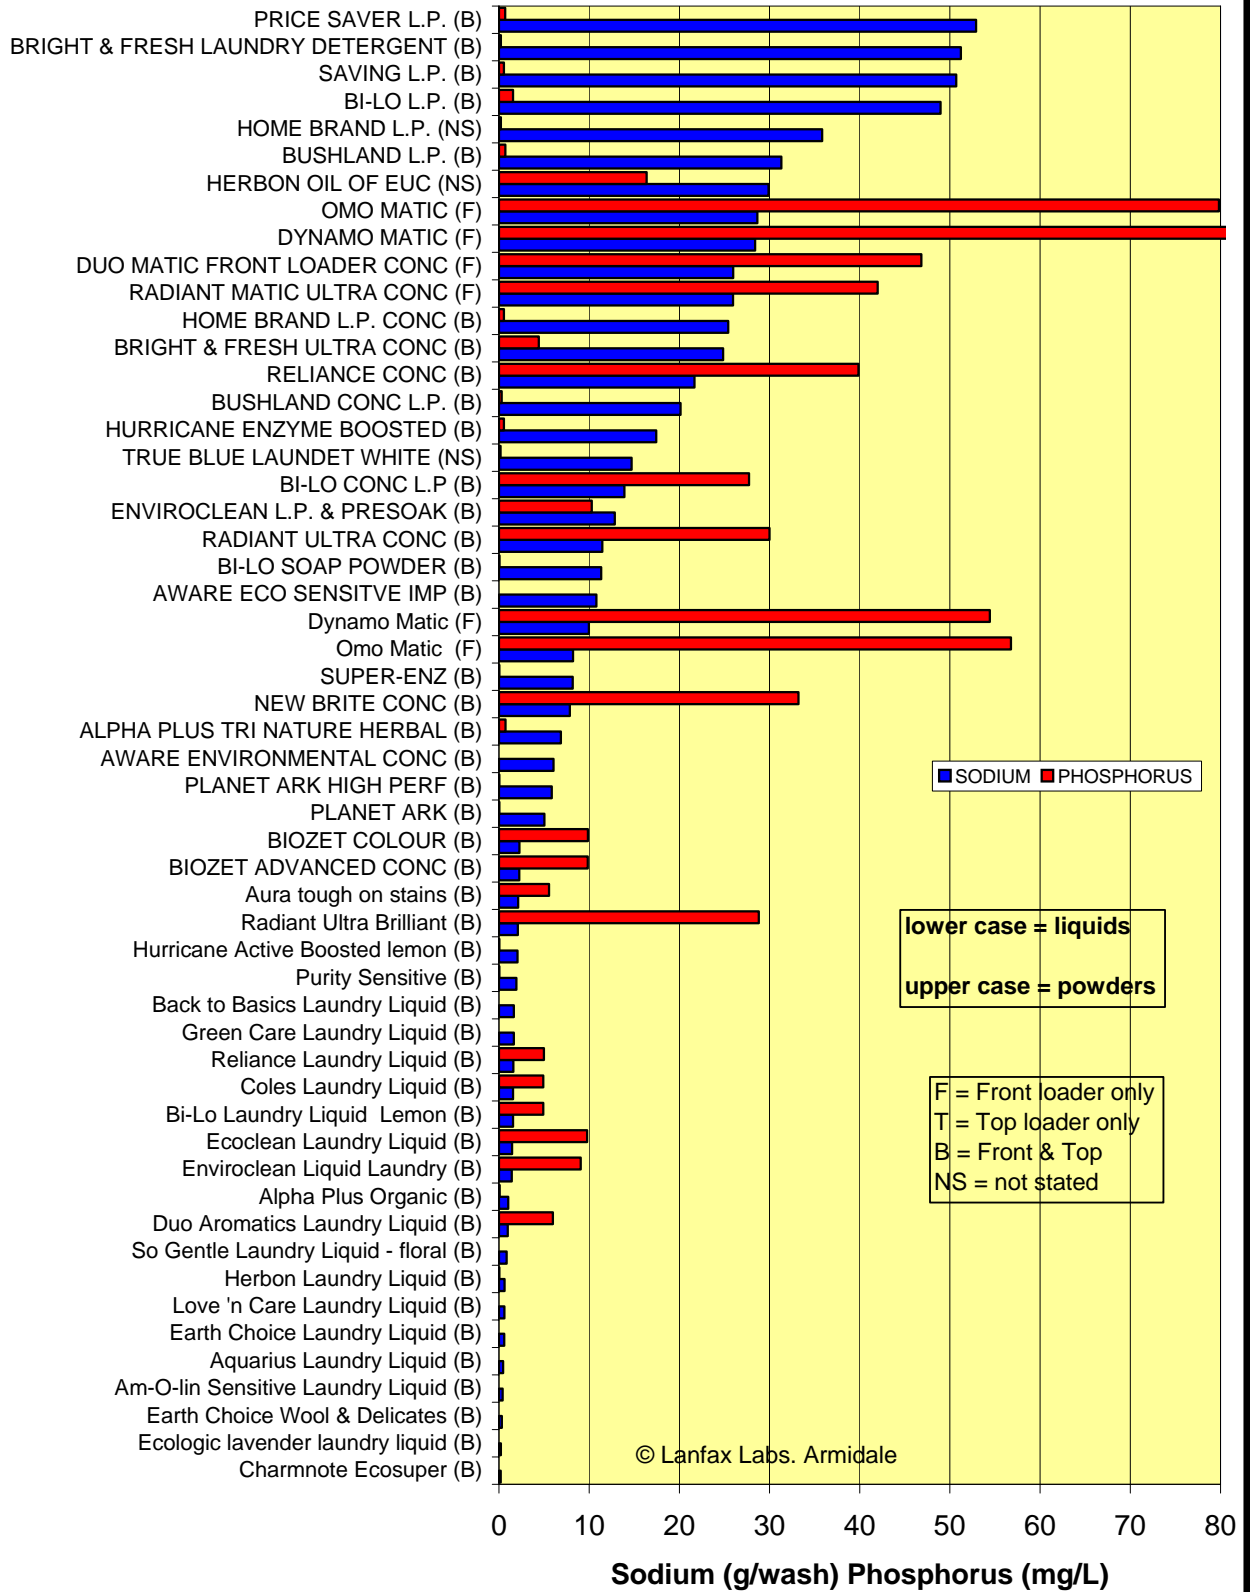


Figure T1 - TOP LOADING MACHINE CYCLE

Full wash cycle: Top loader = 150 L

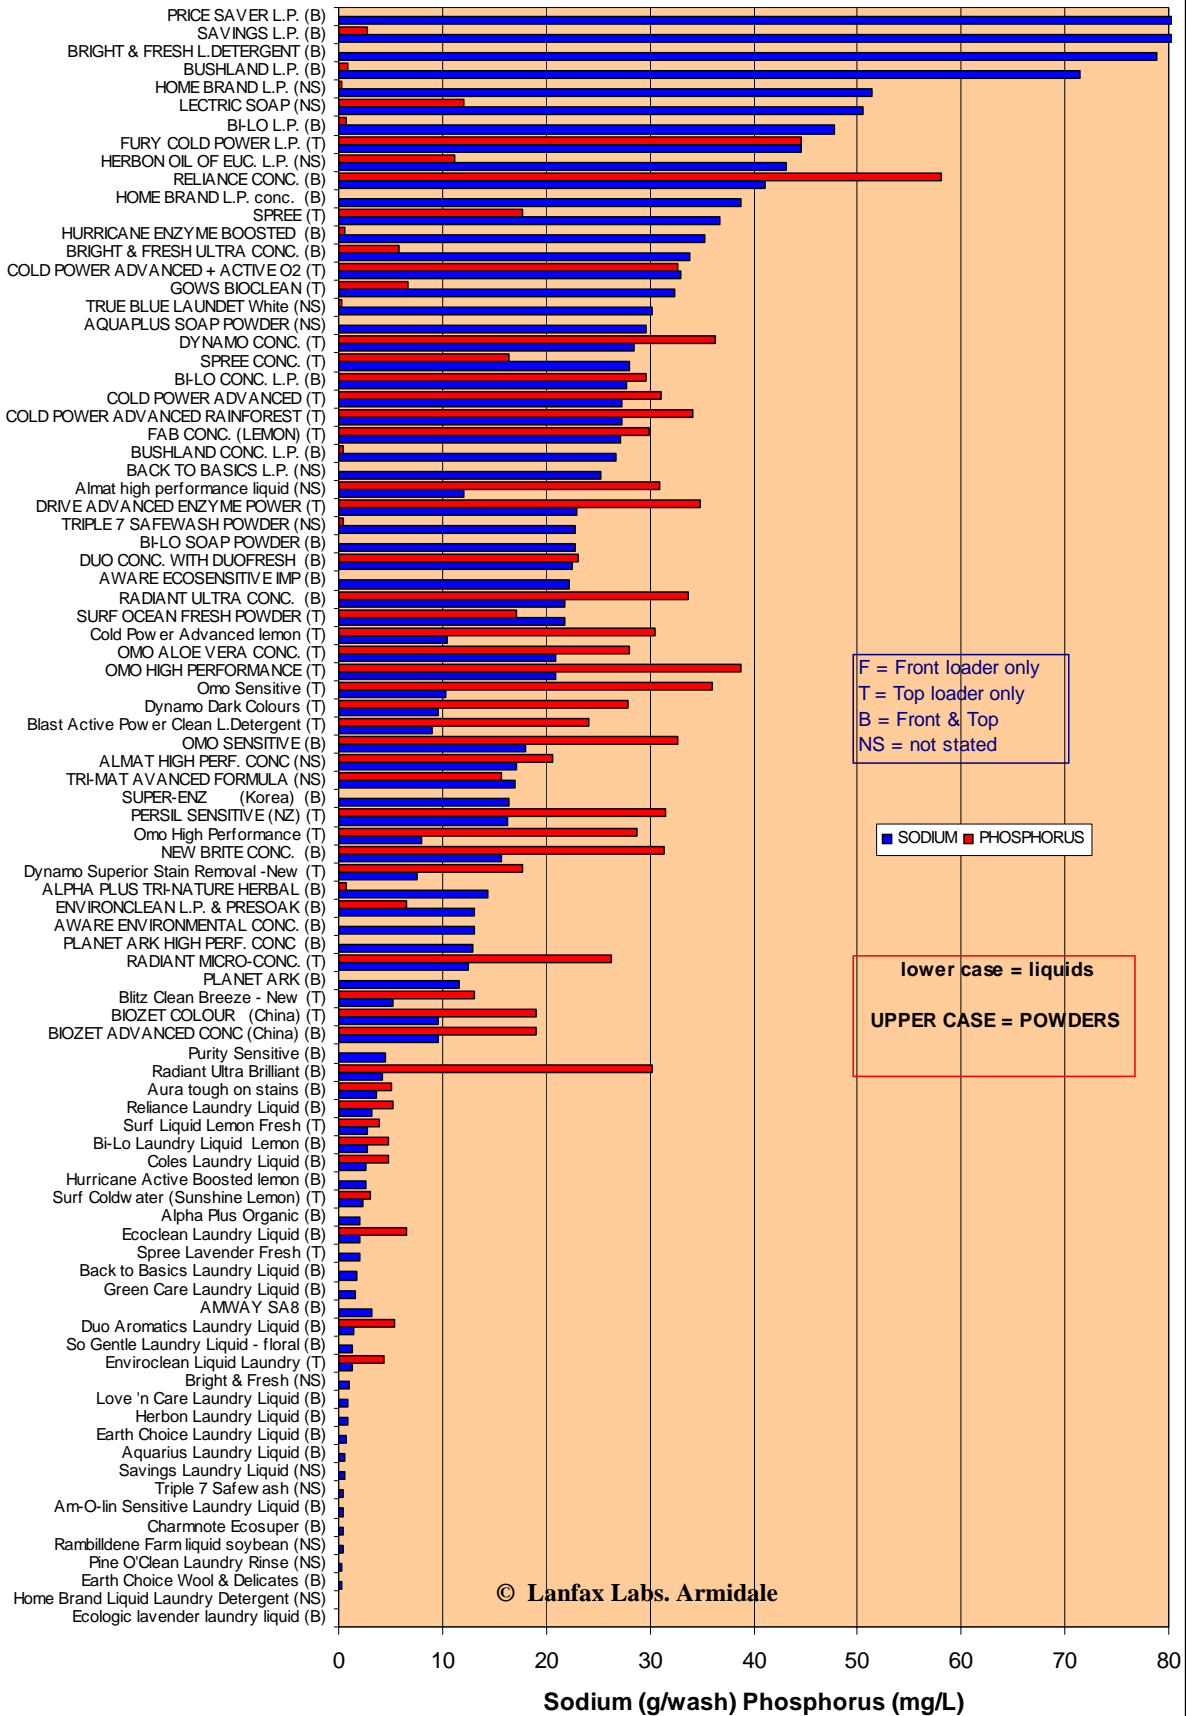

© Lanfax Labs. Armidale